

General Performance Data

Engine	Brand	Baudouin
	Model	6M33G825/5
Control module		DSE 6120
Starting voltage	V	24
Frequency	Hz	50
Number of phases		3

	Prime	Standby
Power kVA	750	825
Power kW	600	660
Rated speed	r.p.m	1500
Standard voltage	V	400 000
Available voltages	V	230 000
Power factor	Cos Phi	0.8

Open



Dimension		
Length (L)	mm	3950
Height (H)	mm	2400
Width (W)	mm	1700
Weight	Kg	5650
Fuel Tank	L	1000

Silent



Dimension		
Length (L)	mm	4406
Height (H)	mm	2503
Width (W)	mm	2056
Weight	Kg	7170
Fuel Tank	L	1150

Fuel Consumption

Rated Output	g/KW.h	L/h
100% Standby	0000	0000
100% Prime	0000	159.5
75% Prime	0000	114.8
50% Prime	0000	77.4
25% Prime	0000	0000

Standards Followed

ISO9001	ISO14001
ISO8528	ISO12100
ISO13849	EN12601
GB12786	GB/T2820
IEC60034	IEC60204
CE	RETIE

General Engine Data

Engine brand	BAUDOUIN	
Engine ref.	6M33G825/5	
Engine type	4 -stroke diesel	
Governor type	Electronic	
Injection	Direct	
Aspiration	Turbocharged and Aftercooled	
Number of cylinders and arrangement	6 - L	
Bore and stroke	mm	150 x 185

Displacement	L	19,6
Cooling system	Water - Cooling	
Lube oil consumption with full load	0.5%-1% of fuel consumption	
Compression ratio	15:1	
Engine oil capacity	L	64
Total coolant capacity	L	94
Air filter	Type	Dry

Diesel engine	Dry air filter
4-stroke cycle	Radiator with pusher fan
Water-cooled	Electronic governor
12V electrical system	Hot parts protection
Water separator filter	Moving parts protection

Optionals

Water jacked heater
Radiator water level sensor
Oil heater
Heavy duty air filter



Alternator Specifications


Number of phase	3
Power factor	0.8
Poles	4
Winding Connections (standard)	Star-serie
Insulation	H class
Enclosure (according IEC-34-5)	IP 23

Excitation system	Shunt
Voltage regulator	Electronic
No. of bearings	Single bearing
Coupling system	Flexible disc
Coating type	Standard (Vacuum impregnation)

Self-excited and self-regulated
IP23 protection
H class insulation

Optionals

Alternator pre-heater
Winding temp. measuring instrument
PMG / AREP / MAUX

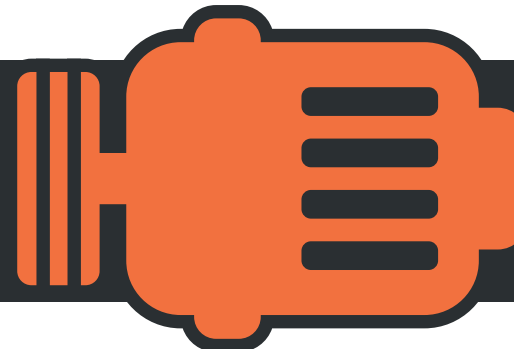

Application Data

Fuel system	Open	Silent
Fuel oil specifications	Diesel	
Standard fuel tank capacity	L 1000	1150

Air system		
Intake air flow	L/s	(m3/min) 54.6
Cooling air flow	m³/s	(m3/min) 747

Exhaust system		
Maximum exhaust temperature	°C	550
Exhaust gas flow	L/s	(m3/min) 187
Maximum allowed back pressure	kPa	N/D

Starting system		
Starting power	kW	4
Recommended battery	Ah	150
Number of batteries		2
Auxiliary voltage	Vdc	24

Genset version

- | | |
|-----------------------------------|--|
| Steel chasis | High mechanical strength |
| Emergency stop button | Epoxy polyester powder coating |
| Anti-vibration shock absorbers | Fuel tank drain plug |
| Chassis with integrated fuel tank | Steel residential silencer - 20dbA attenuation |
| Fuel level gauge | Battery charger |

Optionals

Trailer type



Water-cooled



Three phase



50 Hz



Diesel



Stackable canopy

Standard reference conditions

Ambient conditions of reference according to ISO 8528-1:2018 normative: 1000 mbar, 25°C, 30% relative humidity.

Weights and dimensions based on standard products. Illustrations may include optional equipment. Technical data described in this catalogue correspond to the available information at the moment of printing.

Control Panel Data

Features of the control panel	Basic Model (Standard)	Advanced Model (Optional)
Voltage between phases	o	o
Voltage between neutral and phase	o	o
Current intensities	o	o
Frequency	o	o
Apparent power (kVA)	o	o
Active power (kW)	o	o
Reactive power (kVAr)	o	o
Power factor	o	o
Voltage between phases	o	o
Emergency stop	o	o
Binary inputs	6/6	7/7
Analog inputs	3	3
2x10A Current outputs	o	-
I/O Configuration	o/o	o/o
D+ Function	o	o
Speed sensor	o	o
Amf/Mrs	o/o	o/o
GCB/MCB	o/o	o/o
3ph voltage measurement Gen./Mains	o/o	o/o
3ph current measurement	o	o
kW / kWh / kVA	o	o
Engine reading	o	o
Engine protection	o	o
Alternator protection	o	o
Earth current protection	-	x
History file	150	350
RTC/Battery	o/-	o/o
PLC	-	-
4G	x	-
Airgate	-	x
ECU CAN	o	o
MODBUS	x	x
MODBUS IP	x	x
SNMP	-	x
SNMP TRAPS	-	-
RS232	x	x
RS485	x	x
GSM/GPRS modem	x	x
Remote screen	x	x
Software for PC	x	x

Standard: o Optional: x Not Available: -